


Low VF Three-phase Bridge Rectifiers

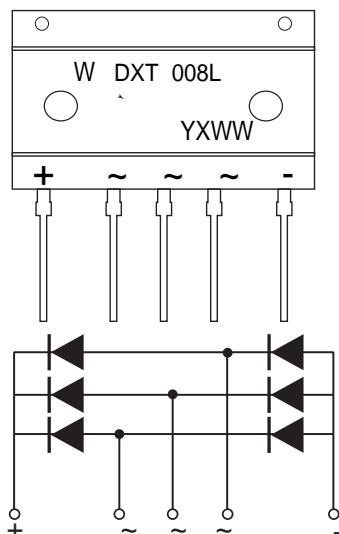

) H D W X U H V

‡* O D V V 3 D V V L Y D W H G & K L S

‡/ R Z , 5 5 0

‡/ R Z 9)

‡+ L J K 9 5 5 0

‡6 S H F L D O I U D P H G H V L J Q I R U K H D

% H Q H I L W V

- Case: DXT
- Terminals: Solderable Per MIL-STD-750
- Reduced power loss and switching transistor

3 D U D P H W H U	Symbols	DXT6008L	8 Q L W V
Maximum Repetitive Peak Reverse Voltage	VRRM	800	V
Maximum RMS voltage	VRMS	560	V
Maximum DC Blocking Voltage	VDC	800	V
Average Rectified Output Current	Io	60	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	450	A
I ² t rating for fusing (1ms < t < 10ms)	I ² t	840	A ² S
Type Forward Voltage at 30.0A	VF	0.93	V
Maximum Forward Voltage at 30.0 A			
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=125 °C	IR	10 500	µA
Typical Junction Capacitance Note1	C _j	50	pF
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +1	°C
Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.			
2. Mounted on glass epoxy PC board with 4x1.5"×1.5" (3.81x3.81 cm) copper pad.			

