

## 7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD  
TSA 3



Cathode Anode

### Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURQWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

### Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡ )UHHZKH'HLRQJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)




3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXPHSHVSHUNYHYURQWDJH		9550		9
0D[LXPYPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDURUHQW VLQDQHQZDYH VXSHULP&QDURHSHGLRGH		,) 60		\$
2SHUDMXQDQWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLFQCHUPDO USHVULVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRUJZDUG SHGLRGH	,) \$	7- f &	7 < 3	0\$;
	,) \$	7- f &		
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHQWUJZDUG UDWHYHYURQWDJH	7- f &	,5		X\$
	7- f &			P\$

1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH


3XOVH WHVW 3XOPH ZLGWK 0

**RATINGS AND CHARACTERISTICS CURVES** (TA = 25 °C unless otherwise noted)

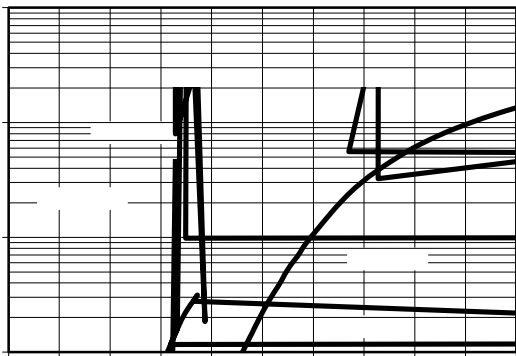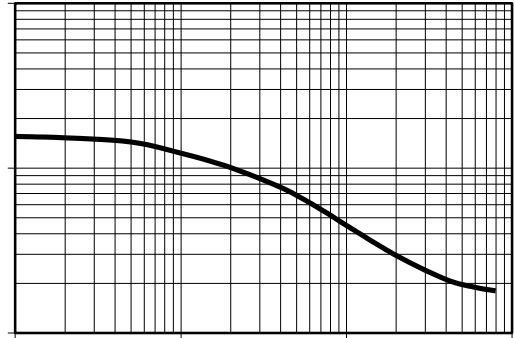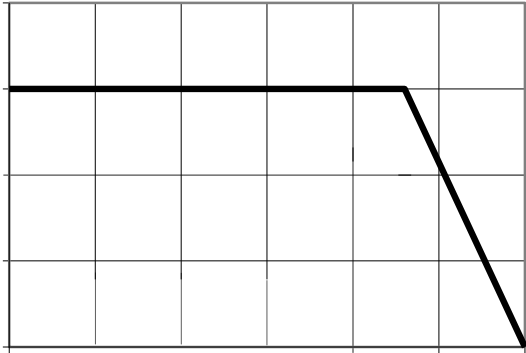


**PACKAGE OUTLINE DIMENSIONS**

**DO-201AD**

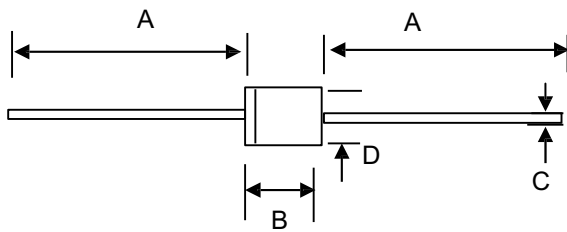


				4	
				1	

**Marking Information**

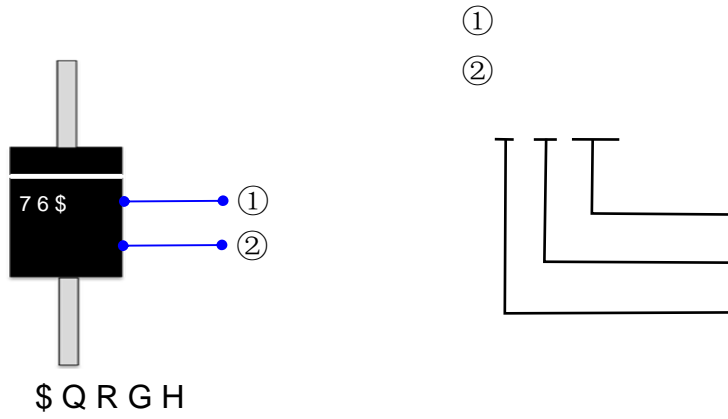

**Packaging Information**

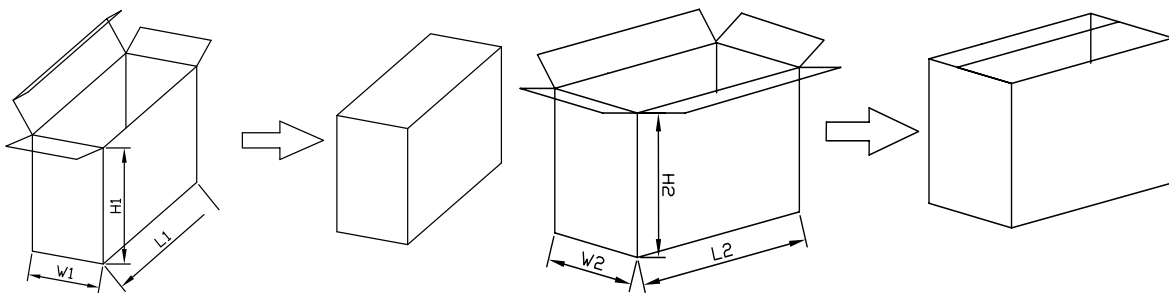

**Packaging Information**

				4	4		